

Honda VFR800X (2017MY)
Screen Adapter Kit Installation.

Remove the Screen from the bike plus the screen adjustment mechanism on both sides, so only the base mounting points are left as shown below.



Loosely fit the bracket assemblies as shown and fasten using the screws, washers and lock-nuts provided - ensure the screen brackets are fixed on the inside of the existing base brackets.
Tighten to 4-6Nm.



The assembled brackets will look like this:



Assemble the new screen screws onto the screen and hold them in place on the back-side using the rubber washers.




Install the screen onto the brackets and fasten using the washers and lock-nuts – only tighten just enough to very lightly compress the rubber washers. Overtightening may cause cracks in the screen.

Note: the rubber washers need to be sandwiched between the screen and the brackets.

Install the **Accessory Bar** (optional) as shown in the picture and tighten enough to prevent rotation of the device you are mounting.



The **Optional Baffle** attaches to the lower adjusting fasteners as shown below with tabs facing downwards:

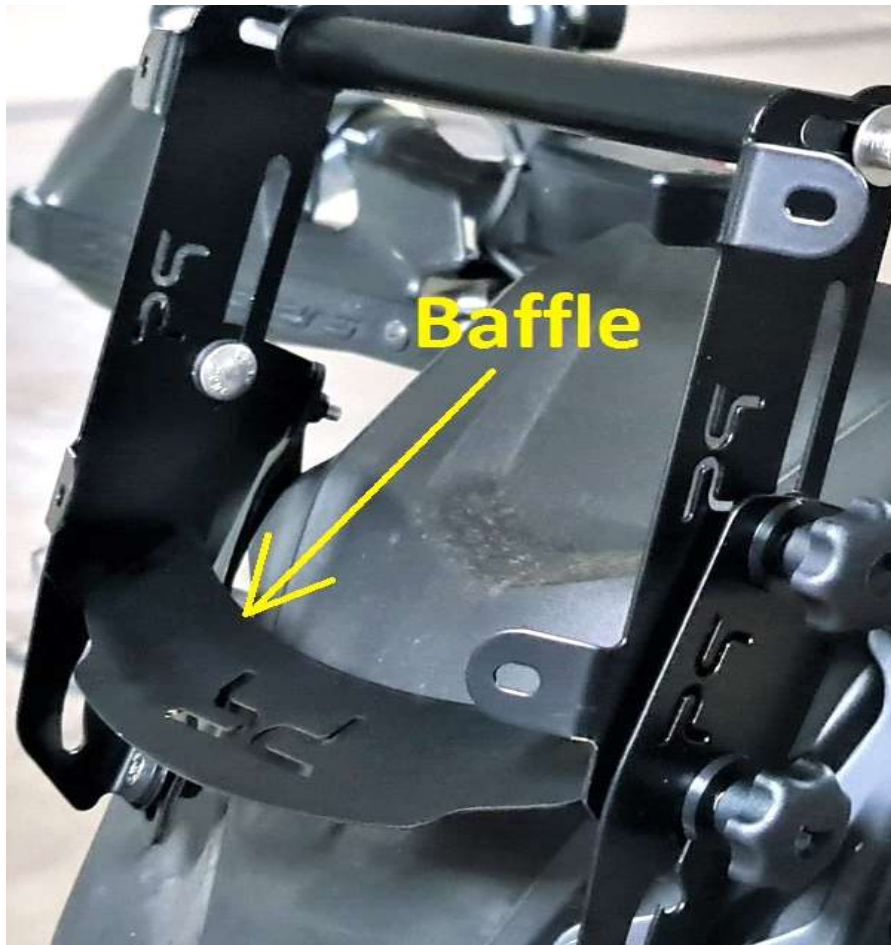

Please note, the Screen's performance is optimised with the Baffle fully open and can be rotated slightly to help fine-tune the airflow required or fully closed to help prevent rain/snow from affecting any electrical items mounted on the Accessory Bar or hitting the rider.

You are now ready to take a test ride and find your best setting(s), taking care to familiarise yourself with the bike's new characteristics.

Do not attempt to make adjustments whilst riding.

END